



*Solas-Linear*®

*Wall Mount Direct Vent Gas Fireplace*



**HEARTH  
INNOVATIONS**


**Hearth Innovations** is proud to introduce The Solas Linear, the latest addition to The Solas family of Wall Mount Direct Vent Gas Fireplaces. *Not a Built-In*, the Solas Linear's unique wall mount design allows for installation throughout the home, without the need for major renovations. Simply hang on the wall to add a dramatic focal point to any room.



The Solas Linear is a highly efficient contemporary fireplace offering all of the features in demand by today's most discerning, design conscious home owner. Despite its sleek profile, the unit's reflective porcelain enamel firebox serves to reflect the flames, adding depth to the flame picture, for a very dramatic effect. As standard, the fireplace comes with a state of the art remote control, which not only allows you to light and operate the fireplace but can also be programmed to control the fireplace thermostatically, automatically controlling your desired room temperature.

The Solas Linear is a highly efficient contemporary fireplace offering all of the features in demand by today's most discerning, design conscious home owner. Despite its sleek profile, the unit's reflective porcelain enamel firebox serves to reflect the flames, adding depth to the flame picture, for a very dramatic effect. As standard, the fireplace comes with a state of the art remote control, which not only allows you to light and operate the fireplace but can also be programmed to control the fireplace thermostatically, automatically controlling your desired room temperature.

**OVERALL DIMENSIONS**

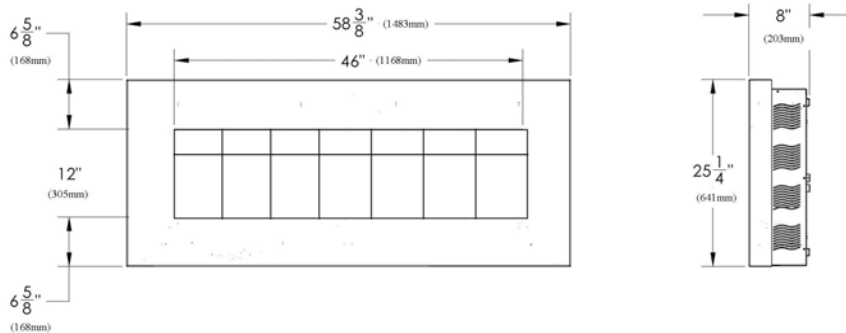

**MINIMUM CLEARANCES TO COMBUSTIBLE CONSTRUCTION:**

Fireplace to L. Side Wall	6" (152mm)	Fireplace to Ceiling	8" (203mm)
Fireplace to R. Side Wall	6" (152mm)	Fireplace to Rear Wall	0" (0mm)*
Fireplace to Corner Wall	6" (152mm)	Fireplace to Floor	3" (76mm)**
Vent Pipe to Adjacent Materials	1.5" (38mm)		

\*Mounting plate bosses contact the wall

\*\*The minimum required clearance to be maintained from the fireplace to combustibles flooring is measured from the top surface of carpeting, tile, etc.



A Division of Progressive Manufacturing Inc.

20 Airpark Road,  
West Lebanon, NH 03784

<http://www.hearthinnovations.com>

<b>INPUT</b>	<b>Natural Gas</b>	<b>Propane (LP)</b>
Hi / Lo Input Rating-Btu/Hr.	29,000 / 19,000	29,000 / 19,000

**EFFICIENCY**

Steady State Efficiency		
(Maximum Observed*) -	78.5 %	79.0 %
Steady State Efficiency -	69.5 %	68.9 %
A.F.U.E. Efficiency -	68.5 %	69.5 %
Canadian P.4 Efficiency -	56.4 %	58.8 %

NOTE: \*The maximum achievable steady state efficiency can vary depending on how the fireplace is installed and operated.

**NOTABLE FEATURES:**

**Installation:** *Not a Built-In.* Simply hangs on the wall.

**Venting options:**

Direct Vent through outside wall or vertical through the roof up to 30 ft.

**Vent type:**

5 - 8" diameter Co-Axial Direct Vent. Unit is supplied with Starter Collar & Wall pass through as standard.

**Controls:**

Manual Control Panel on right hand side of unit. A state of the art Programmable, Thermostatic Remote Control is supplied as standard.

**Burner / Media:**

46" Wide Ribbon Burner with crushed Fire-glass Burner Media.

**Doors/glass:** Fixed Neo-Ceramic Glass Panel.

**Firebox Interior:**

Reflective Porcelain Enamel Firebox Liners.

**Construction:**

Firebox constructed from fully welded, heavy duty Aluminized Steel.

**Surround Options:**

- Brushed Stainless Steel.
- Brushed Stainless Steel / Satin Black Combo.
- Satin Black.
- Steel Grey.

**Certification:**

To ANSI Z21.88-2009, CSA 2.33-2009 Vented Gas Fireplace Heaters and CAN/CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09 by OMNI Test Laboratories Inc.

**Warranty:**

Limited 3 year Warranty.

***PROUDLY BUILT IN THE U.S.A.***

**Authorized Dealer:**