



Solas[®]
Wall Mount Direct Vent Gas Fireplaces!



**HEARTH
INNOVATIONS**

Hearth Innovations brings you a new concept in fireplaces, *The Solas*® is a revolutionary Wall Mount Direct Vent Gas Fireplace. Simply hang the unit on an outside wall and direct vent for a simple, effortless, installation. On an inside wall, the fireplace can be installed with venting runs of up to 20ft vertical and 10ft horizontal, allowing for a wide range of installation options throughout your home.

With two models to choose from, *The Solas*® is a 38³/₄" wide, 19,000 BTU "landscape" format unit designed for larger room settings. *The Solas-Nua*® is a narrower "portrait" format, measuring just 23¹/₂" wide with an input of 13,500 BTU's, ideal for smaller more intimate room settings. Both models are heater rated and offer a spectacular flame picture which is enhanced by the reflective porcelain enamel firebox liners.

Both units offer today's discerning consumer designer styling with a wide range of surround colors and options available. The surround can be changed in a matter of seconds, without the use of tools. So, if you decide to change your rooms' decor the fireplace can be modified quickly and inexpensively to complement the new look of your room.



- Ease of Installation. Wall Mount.
- Direct Vent, Heater Rated.
- Natural Gas and Propane Models available.
- Up to 19,000 BTU Input.



- Venting runs of up to 20ft vertical and 10ft horizontal.
- Automatic Pilot Ignition.
- Remote Control Standard.
- Automatic Hi/Lo Flame Height Adjustment.



- Modern Contemporary Look, offering Designer Styling.
- Clear Glass Burner Media.
- Wide Range of Interchangeable Surround Options.



- The Solas-Nua*® comes with a unique corner mounting kit allowing the fireplace to be mounted directly into a corner, saving space and creating a focal point in any size room.
- Proudly Designed and Built in the USA.

SPECIFICATIONS:

Product specifications subject to change without notice. Please consult the product installation and operating instructions for the most up to date and complete specifications.

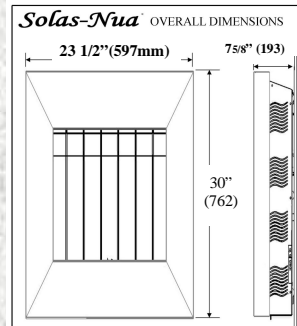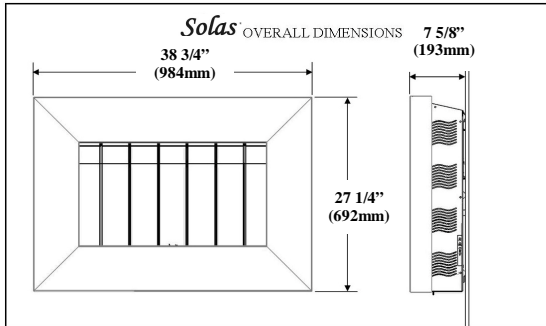

INPUT

	Natural Gas	Propane (LP)
<i>Solas</i> Hi / Lo Input Rating-Btu/Hr.	19,000 / 11,000	19,000 / 11,000
<i>Solas-Nua</i> Hi / Lo Input Rating-Btu/Hr.	13,500 / 7,500	13,500 / 7,500

EFFICIENCY

	Natural Gas	Propane (LP)
<i>Solas</i> Steady State Efficiency - %	65.0	61.4
<i>Solas</i> Canadian P.4 Efficiency - %	55.1	50.0
<i>Solas-Nua</i> Steady State Efficiency - %	62.6	56.4
<i>Solas-Nua</i> Canadian P.4 Efficiency - %	56.2	48.7

MINIMUM CLEARANCES TO COMBUSTIBLE CONSTRUCTION:

Both Solas & Solas-Nua

Fireplace to L. Side Wall	6" (152mm)	Fireplace to Ceiling	8" (203mm)
Fireplace to R. Side Wall	6" (152mm)	Fireplace to Rear Wall	0" (0mm)*
Fireplace to Corner Wall	6" (152mm)	Fireplace to Floor	3" (76mm)**
Vent Pipe to Adjacent Materials	1.5" (38mm)		

*Mounting plate bosses contact the wall

**The minimum required clearance to be maintained from the fireplace to combustibles

Authorized Dealer:

HEARTH INNOVATIONS

A Division of Progressive Manufacturing Inc.

20 Airpark Road,
West Lebanon, NH 03784
www.hearthinnovations.com